

## PRODUCT BRIEF

KM-2, Ara-2 M.2 Module

## Powering Large Language Models on PCs and embedded systems

The KM-2 module is a M.2 M-key module that is powered by Ara-2, Kinara's latest AI processor. It provides the simplest path for users to upgrade their PCs and embedded systems to join the new age of Generative AI. Run large language models (LLMs) for increased productivity or stable diffusion models to generate novel images.


Built on the same flexible and efficient dataflow architecture as the Ara-1, the 40 TOPS Ara-2 boosts performance up to eight times, resulting in tremendous increases in compute efficiency.



- · Run large language models at the edge, enabling real-time creativity and productivity.
- · Fuel powerful transformer-based models, driving breakthroughs in video analytics and natural language processing.
- · Revolutionize edge applications from smart cities to smart retail to manufacturing.
- · Utilize Ara-2's perfectly balanced compute, on-chip memories, and high off-chip bandwidth to execute very large models with extremely low latency.
- · Process multiple models without incurring switch-time performance penalties.

## Al Acceleration for Many Applications


- · Al Assistance, Copilot
- Gaming
- · Smart retail
- Physical security
- Factory automation

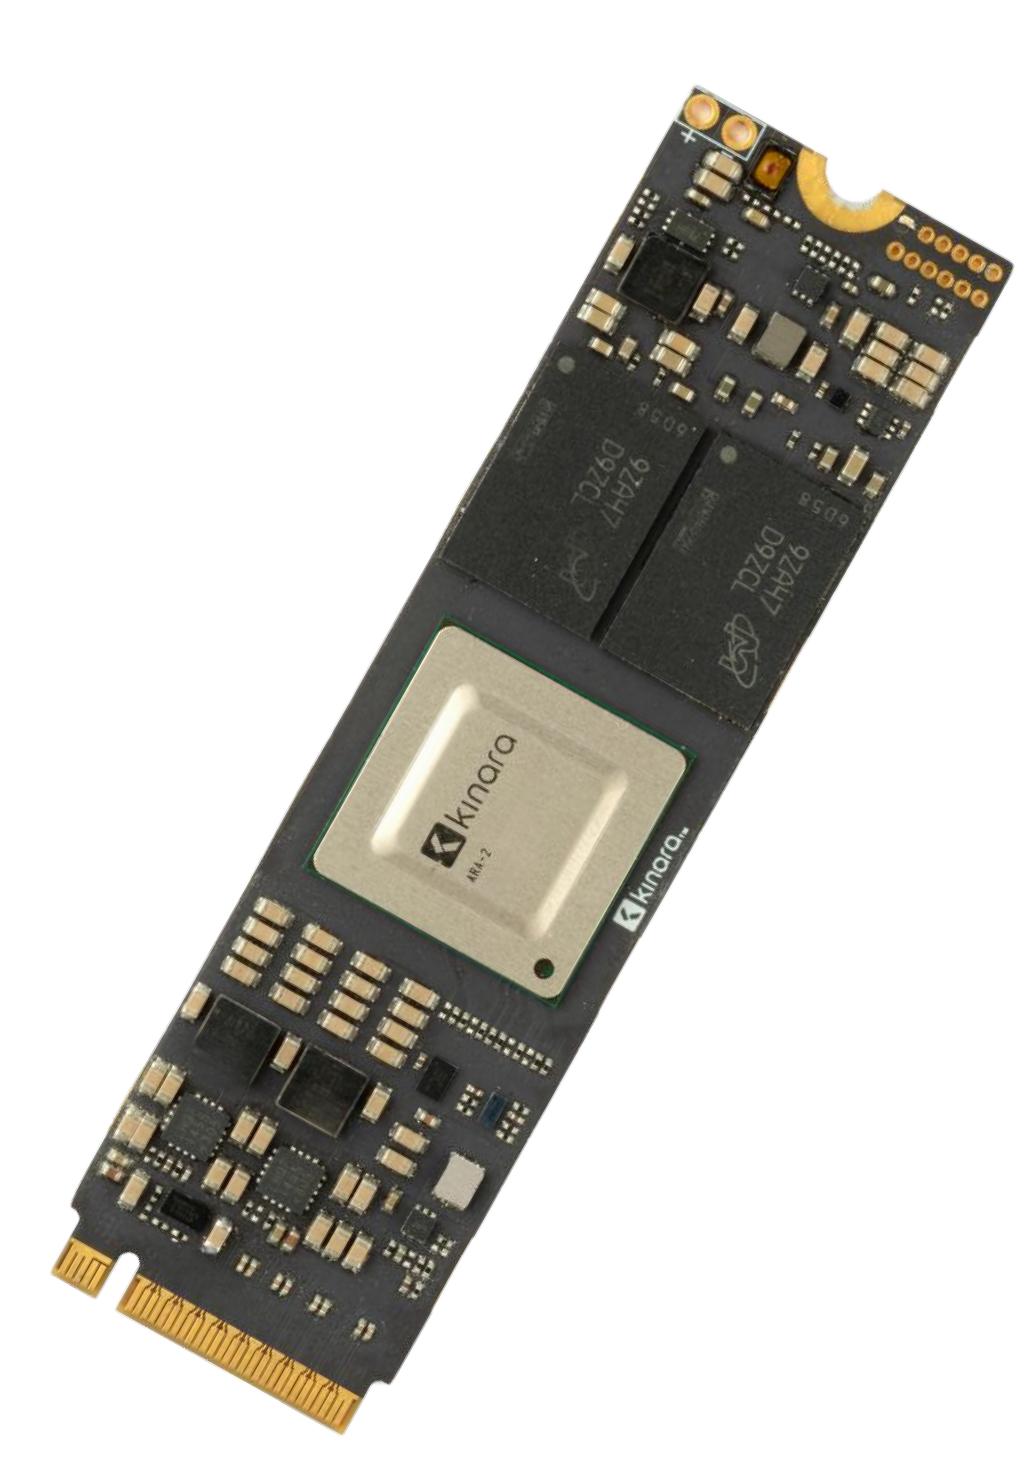

Inquire Now



| Key Features              |  |
|---------------------------|--|
| Al Frameworks             | TensorFlow, PyTorch, ONNX  |
| Performance               | Stable Diffusion 1.4: 7 sec/image<br>Llama2-7B: 12 output tokens/sec<br>MobileNetV1 SSD: 974 IPS (1.03 ms latency) |
| Security                  | Secure Boot, Root-of-trust processor, encrypted interface  |
| Memory (LPDDR4)           | 8GB / 16GB   |
| Operating System Support  | Linux, Windows   |
| Host Interface            | 4-lane PCIe Gen 4  |
| Dimensions (W x L)        | 22mm x 80mm  |
| Operating Temperature     | 0°C – 50°C   |
| Power Consumption         | 3W (typical workload)<br>8W (full performance)   |
| Thermal Management (Typ.) | Active cooling (heatsink with fan)   |
| Host Processor            | x86, Arm   |
| Certification             | CE / FCC Class B (pending)   |
| Ordering Information      | ARA-P421-CM2-8 (8GB version)<br>ARA-P421-CM2-16 (16GB version)   |

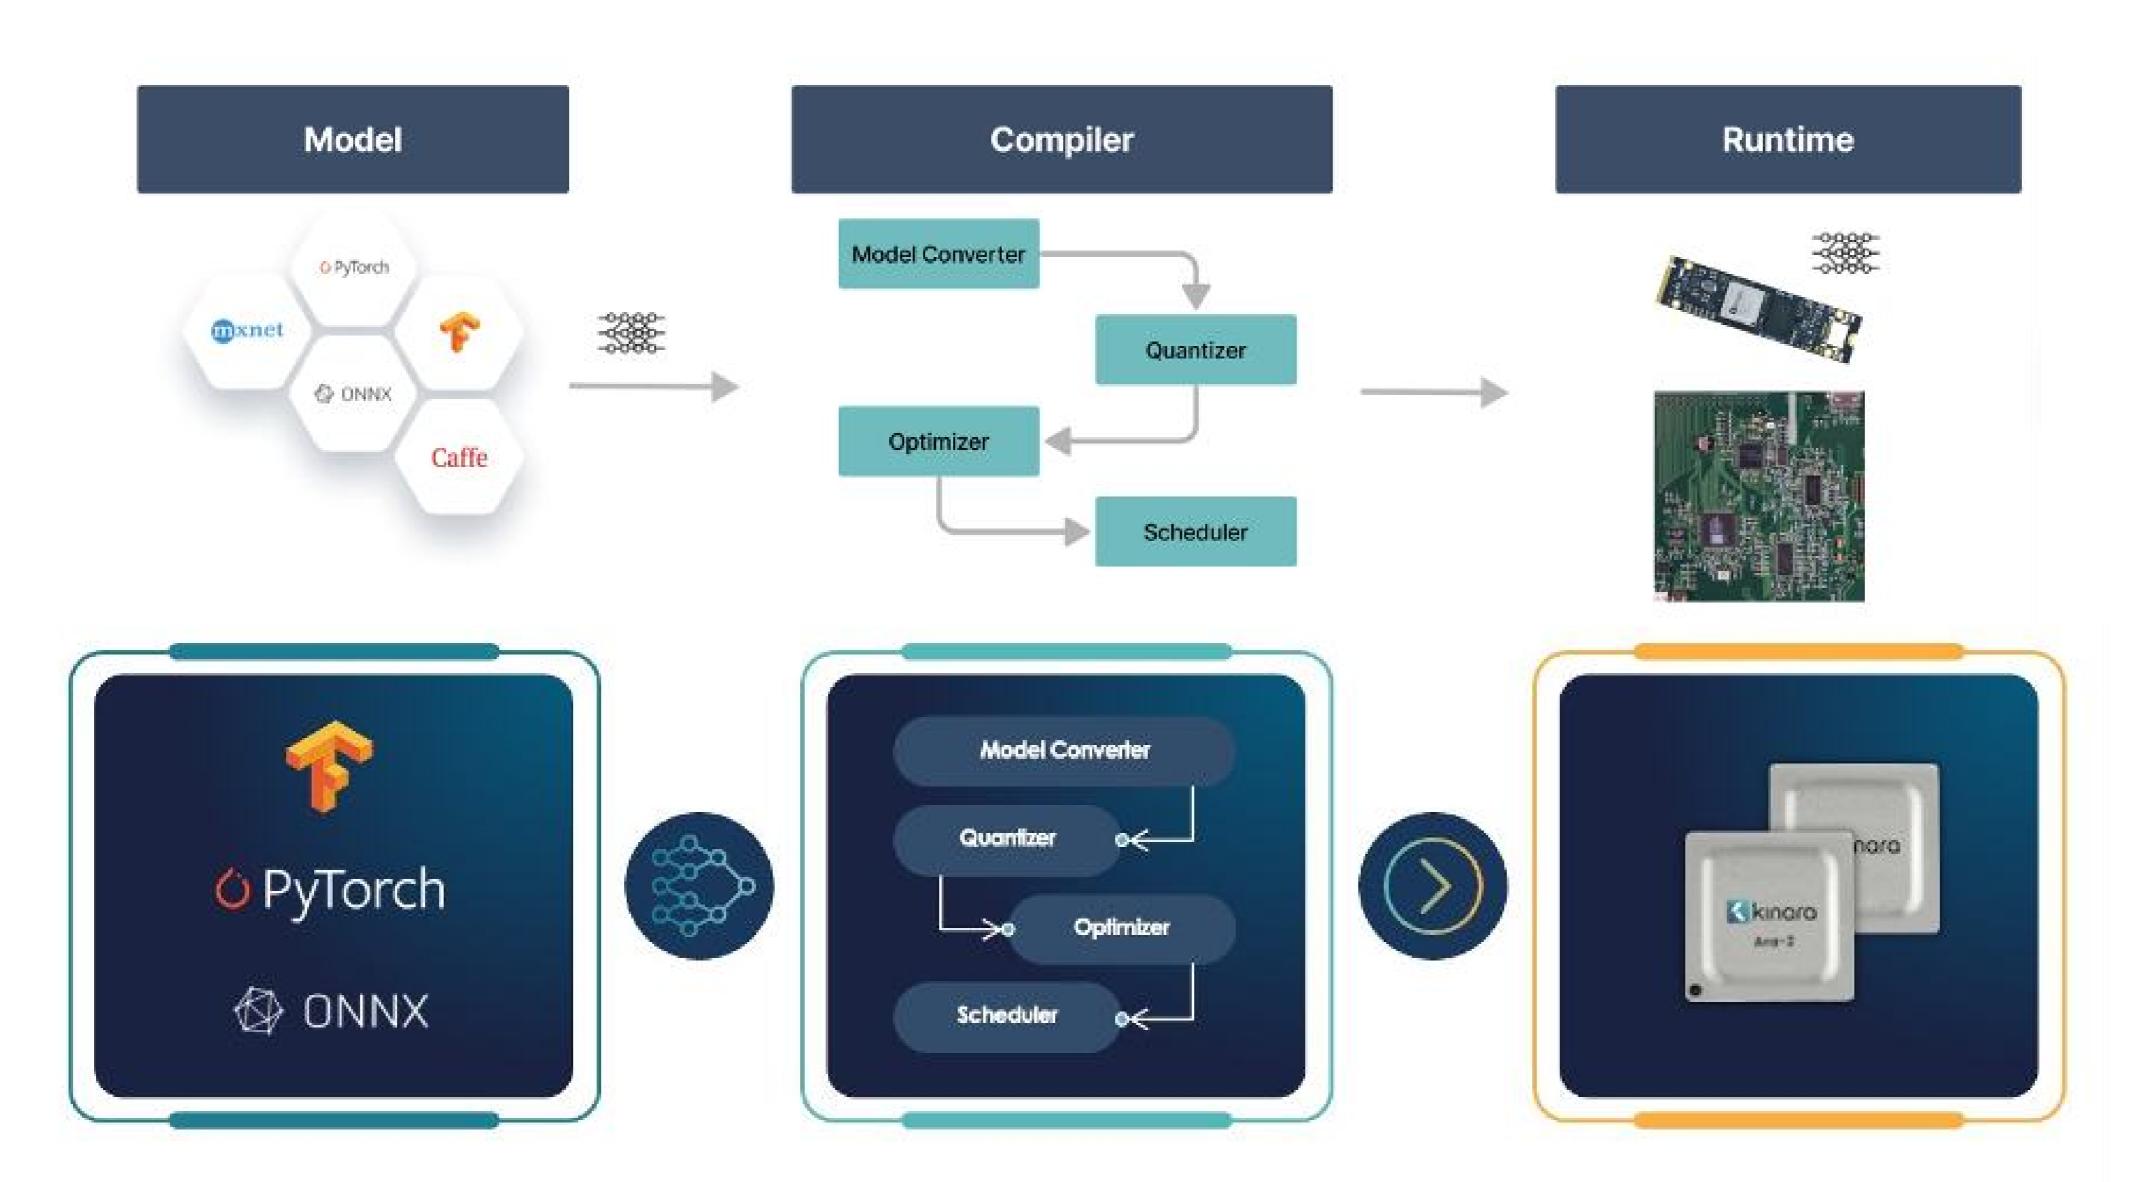

Kinara's end-to-end software seamlessly migrates trained AI models, including pre-quantized models. Our 'software first' approach enables users to run their own custom models without requiring any retraining. In addition, the software can run multiple models on the same stream without any model switching cost-resulting in low latency inferences for edge AI deployments. The software supports all state-of-the-art models including Generative AI and vision transformers.

